

# NOISE FLOATING CABLE

## NOISE FLOATING CABLE

Intellectual property rights registration No. 42799

The ball jacket adopted reverses the common sense of a cable.

Most covering material of a cable is basically made from soft and easy-to-handle materials such as PVC, Teflon, the silk thread, etc., and the sound quality has been pursued in the restricted range of these materials. We adopted a ball jacket as covering material, which greatly improved the vibration damping of a cable. Furthermore, the powder is employed for high-end models to guide an electromagnetic wave and a high frequency noise, again reversing the common sense of a cable.



Low noise power cable  
RPS-300SZ 1.0M


Digital cable  
DiSi-ALM500SuperSZ 1.0M

Pin cable  
8NCu-ALM500Super 1.0M

Speaker cable  
SPC-ALM500Super 1.5M

### Power cable RPS-300SZ 1.0m

This cable uses the high-purity silver coating copper material with Teflon covering, and the guiding system on the equipment side changes high frequency into Joule heat to realize very low-noise, high-power and high-quality sound.

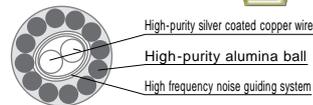


Material / shielding: none (high-frequency guided) neutral line: high-purity silver coating copper

Specification / ULTRA SZ processing, special alloy solder welding, and a high-frequency guiding system  
Covering material / polyethylene, PVC, and high-purity alumina ceramic ball floating (ground unconnected)

Export model

### High-end power cable RPS-7000SZ 1.0m

In order to sharply decrease an EMI, RFI noise harmful to sound quality, a special alloy powder jacket is adopted. The multi-gauge wire with three kinds of thickness is used for the stable, clean power supply.




Wire material / 3 multi-gauge high-purity silver coating copper with Teflon covering  
Wire area / 3.5SQ Vibration damping / special powder  
Shielding / special powder & ground side shielding Outer covering / high-density nylon mesh  
IEC plug / rhodium by Furutech AC plug / rhodium by Furutech Physical processing / ULTRA SZ

Export model

### High-end pin cable REF-SI7000SZ 1.0m


Our line cable employs special powder balls to absorb and extinguish all kinds of noise and detrimental vibration of all zones. The SN ratio is no match for other cables and the sound correctly transmitting the music signal develops the ideal music stage, such as high purity, high resolution, high signal to noise ratio, and high speed.



Wire material / high-purity silver coating copper, and Teflon-covered shielding  
Shielding / special powder balls Vibration damping / special powder balls Outer covering / high-density nylon mesh  
RCA plug / made by U.S. VAMPIRE Physical processing / ULTRA SZ

### Speaker cable SPC-ALM500Super 1.5m


The 99.999999% (8N) ultra SZ processed super-purity Cu is used for wire material. The noise guiding system guides noise and changes it into Joule heat. An innovative passive filter free from sonic deterioration is also adopted.

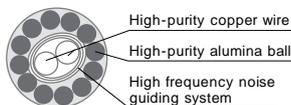

Wire material / 99.999999% super-purity Cu (8N)  
Specification / high frequency noise guiding system (equipped on the speaker connection side to convert harmful noise into Joule heat)  
ULTRA SZ processing, cryogenic temperature processing & physical processing (Y-shaped lug), and special alloy solder welding  
Covering material / polyethylene, PVC, and high-purity alumina ceramic ball floating  
1.5M -> (amplifier side 0.2M+ main part 1.5M+ speaker side 0.15 M) full length about 1.9M.  
Banana terminal attachment ¥1,200 per place. (Only at the time of order, extra charge after purchase)

### Pin cable 8 NCu-ALM500Super 1.0m


The 99.999999% (8N) super-purity Cu is used for a hot wire material and the tin-plated 4N shielding wire realized flat response full of sound information.

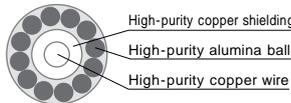

Wire material / hot 99.999999% super-purity copper (8N) shielding 99.99% tin-plated copper  
Specification / ULTRA SZ processing, cryogenic temperature processing & physical processing (plug), and special alloy solder welding  
Covering material / polyethylene, PVC, and high-purity alumina ceramic ball floating


### Digital cable DiSi-ALM500SuperSZ 1.0m

This cable employs OFS high-purity silver coating material for its core wires with the 3-fold shielding design of aluminum foil and double copper mesh.

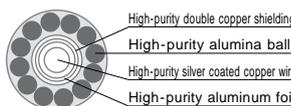

Wire material / hot - OFS silver coating material  
shielding - aluminum foil and double OFS copper mesh  
Specification / ULTRA SZ processing, cryogenic temperature processing & physical processing (plug), and special alloy solder welding  
Covering material / polyethylene, PVC, and high-purity alumina ceramic ball floating  
Impedance / 75

### Cable noise stabilizer CNS-7000SZ

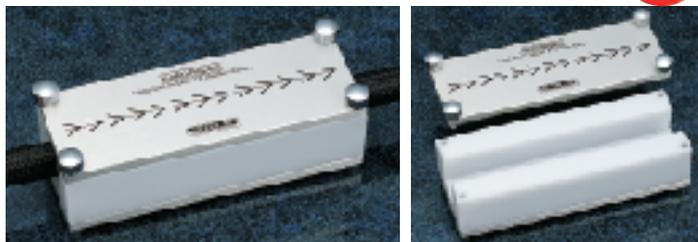

By effectively guiding and intercepting the noise induced in a cable before reaching equipments, a clean environment is provided for the system. The cable noise stabilizer has effect on every cable for perfect, final noise care, which makes the music buried in the noise sound clearly and vividly.

Material / high-purity special polymer Panel material / airplane aluminum alloy  
Forming / CNC machined Specification / ULTRA SZ physical processing & noise absorber fitting  
Size / 150mmx55mmx50mm (top screws excluded) Cable insertion size / 20mmx20mm

# ANALOG RECORD ACCESSORY

## Vinyl disk accessories

Intellectual-property-rights registration No. 42798

More reality and rich feelings to the vinyl sound.

Since vibration has a large influence on the vinyl reproduction, an exact vibration processing is essential and quick-response material is ideal in order to bring out the maximum from a vinyl music disk. The rigid direct vibration processing instead of damping will surely rewrite the book on the vinyl system.

### High-end head shell RHS-1 HR



This high-end head shell sumptuously employs the super-purity silica glass most ideal to shut out vibration. By mounting a cartridge directly on the quartz, vibration is processed with ultra high-speed to reduce distorting noise to a limit. The important nuance buried in the noise is restored to life, greatly improving the minute detailed music information picked up by the cartridge.

Material / shell part: Super-purity HR silica glass  
connector part: sapphire crystal growth film processed machined aluminum  
Weight / about 14g (including lead wire)  
Lead wire supplied / cryogenic temperature & physical processed wire

### High-end platter sheet TS-OPT300 HR



This platter sheet for a vinyl disk adopts super-purity silica glass of which acoustic velocity, vibration processing speed and capacity are markedly superior to any other material. The platter copes effectively with a wide range of distorting vibration of a vinyl disk taking advantage of its insulator effect, and this results in a super sound quality both in analog and digital reproduction never heard before.

Material / audio grade super-purity HR silica glass (Quartz)  
Size / 300x4mm  
Center hole 7.4 (for spindle)  
Center hole 105x1mm (hollow on the label side)  
Weight / 610g Finish / whole surface polished

### High-end stabilizer OPS-1 HR



By using the super-purity silica glass, our stabilizer performs direct vibration control of a vinyl disk. The stabilizer changes the vibration peculiar to vinyl into the silica glass vibration mode of a super-wide range free from distortion, bringing out the full information a vinyl disk originally has.

Material / audio grade super-purity HR silica glass (Quartz)  
Size / 70x20mm  
Center hole 7.4 (for center spindle)  
Weight / 165g  
Finish / whole surface polished